

ALVA

PRODUCT CATALOG

PVC Conduit System

- SCH 40 and 80 PVC Pipes •
- PVC Utility Duct • PVC Elbows




ALVA

ALVA Manufacturing is your trusted source for high-quality PVC conduit solutions. With over 30 years of manufacturing expertise, we deliver UL-Certified conduits designed for reliability and safety across a range of electrical applications.

Our conduits, utility ducts, and elbows meet stringent standards while ensuring ease of installation.

In addition to PVC, our plants manufacture CPVC, HDPE, and PPR pipes, offering comprehensive solutions tailored to our customers.

At **ALVA Manufacturing**, we prioritize customer satisfaction by seamlessly managing the supply chain from order to delivery. Our commitment to quality and innovation ensures consistent performance and reliability in every product.

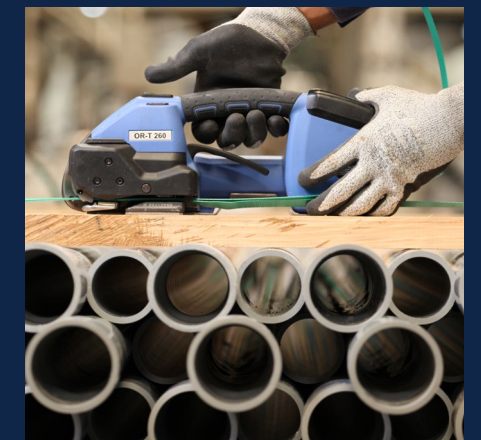

PVC Conduit

PVC Conduit, also known as polyvinyl chloride conduit, is a type of plastic pipe commonly used in electrical applications to protect and route electrical wiring. It is a rigid, non-metallic pipe made of PVC material, which is a thermoplastic polymer that is lightweight, durable, and resistant to corrosion, moisture, and impact.

ALVA Manufacturing offers **PVC Conduit** in sizes ranging from 1/2 inch to 6 inches in diameter. **PVC Conduit** is typically used in applications where a high degree of physical protection is required.

ALVA Manufacturing PVC Conduit is easy to install and is certified to be used in outdoor and underground applications where exposure to harsh weather conditions or moisture is a concern. It can also be used in commercial and industrial settings, as well as in residential applications, such as wiring for lighting fixtures and outlets.

Non-metallic conduit, such as PVC conduit, has several advantages over metal conduit:

1. Corrosion Resistance: Non-metallic conduit is resistant to corrosion, which makes it ideal for use in outdoor and damp environments. In contrast, metal conduit can corrode over time, particularly if it is exposed to moisture or other harsh conditions.

2. Lightweight and Easy to Install: Non-metallic conduit is much lighter than metal conduit, which makes it easier to install and handle. This can result in faster installation times and lower labor costs.

3. Low Conductivity: Non-metallic conduit has low conductivity, which means that it doesn't conduct electricity. This can be an advantage in situations where you want to reduce the risk of electrical shock.

4. Cost-effective: Non-metallic conduit is generally less expensive than metal conduit, making it an attractive option for projects with tight budgets.

5. Chemical Resistance: Non-metallic conduit is resistant to many chemicals and solvents, which can make it a good choice for use in industrial or chemical applications.



In summary, non-metallic conduit has several advantages over metal conduit, including **corrosion resistance, lightweight and easy installation, low conductivity, cost-effectiveness and chemical resistance**

PVC conduit with SCH. 40 (Schedule 40) and SCH. 80 (Schedule 80) designations refer to two different types of PVC conduit that have different wall thicknesses and are used for different applications. Here are some key differences between SCH. 40 and SCH. 80 PVC conduit:

Wall Thickness:

SCH. 40 PVC conduit has a thinner wall compared to SCH. 80 PVC conduit. The wall thickness of SCH. 40 conduit is generally sufficient for most standard electrical wiring applications, while SCH. 80 conduit has a thicker wall, providing increased mechanical strength and durability.

Mechanical Strength:

SCH. 80 PVC conduit is typically stronger and more rigid than SCH. 40 PVC conduit due to its thicker wall. It is designed to handle heavier loads and is suitable for applications where there may be higher mechanical stress or potential for damage, such as in industrial or commercial settings.

Durability:

SCH. 80 PVC conduit is generally more durable than SCH. 40 PVC conduit due to its thicker wall, making it more resistant to impact, crushing, and other physical stresses. SCH. 80 conduit is often used in applications where increased durability and mechanical protection are required.

Cost:


SCH. 40 PVC conduit is typically less expensive than SCH. 80 PVC conduit due to its thinner wall. SCH. 40 conduit is often used in residential and light commercial applications where cost may be a consideration, while SCH. 80 conduit is used in more heavy-duty applications that require increased mechanical strength and durability.

Application:

SCH. 40 PVC conduit is commonly used in standard electrical wiring applications, such as residential and light commercial installations, where the conduit is not exposed to high levels of mechanical stress or potential for damage. SCH. 80 PVC conduit is typically used in more demanding applications, such as industrial, commercial, outdoor, and underground installations, where increased mechanical strength and durability are required.

It's important to note that local building codes and regulations should always be followed when selecting and installing PVC conduit or any other electrical conduit, and professional consultation may be required for specific applications to ensure compliance and safety.


ALVA

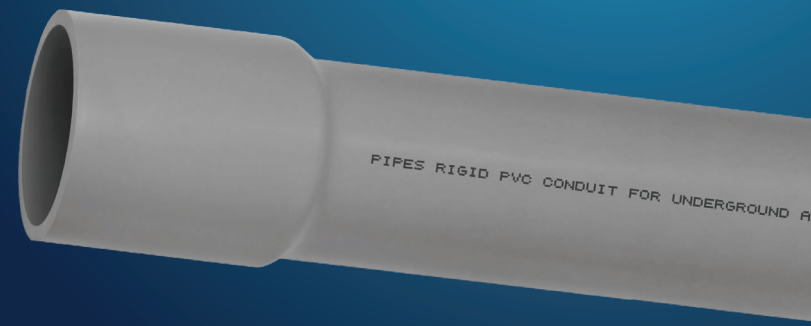

PVC Conduit Schedule 40

Schedule 40 PVC Conduit are manufactured with rigid Polyvinyl Chloride (PVC-U) compound according to the specifications of the UL 651 and ASTM D 1784 STANDARD.

- Rated for use with 90-degree C wire.
- UL Listed SUNLIGHT RESISTANT rated, according UL 651 - file number E528320
- Certified for underground and above ground usage
- For direct burial and encased burial usage
- Rigid non metallic PVC for wires and cables
- 10' Lengths • 20' Lengths (on request)

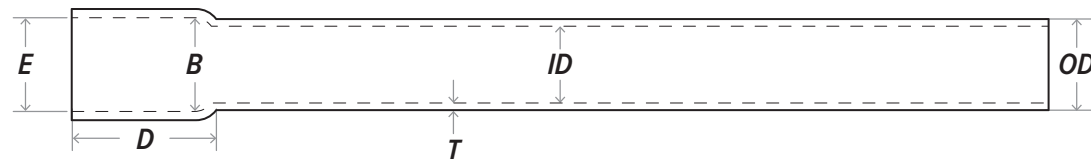

PVC Conduit Schedule 40 (Crate Quantities)									
Part No.	Size inch	Minimum wall inch	Average inch (OD)	Average inch (ID)	Average entrance inch (E)	Average bottom inch (B)	Length feet	Bell End inch (D)	Feet per bundle
P01UC	1/2	0.109	0.840	0.578	0.852	0.836	10	1.77	6,000
P02UC	3/4	0.113	1.050	0.780	1.064	1.046	10	2.16	4,400
P10UC	1	0.133	1.315	1.004	1.330	1.310	10	2.56	3,600
P11UC	1-1/4	0.140	1.660	1.335	1.677	1.655	10	3.15	3,300
P12UC	1-1/2	0.145	1.900	1.564	1.918	1.894	10	3.15	2,250
P20UC	2	0.154	2.375	2.021	2.393	2.369	10	3.15	1,400
P21UC	2-1/2	0.203	2.875	2.414	2.890	2.868	10	3.15	930
P30UC	3	0.216	3.500	3.008	3.515	3.492	10	3.94	880
P31UC	3-1/2	0.226	4.000	3.486	4.015	3.992	10	3.94	630
P40UC	4	0.237	4.500	3.961	4.515	4.491	10	3.94	570
P50UC	5	0.258	5.563	4.975	5.593	5.553	10	3.94	380
P60UC	6	0.280	6.625	5.986	6.658	6.614	10	5.90	260
P80UC	8	0.322	8.622	7.850	8.670	8.610	10	6.29	180


ALVA



PVC Conduit Schedule 80

Schedule 80 PVC Conduit are manufactured with rigid Polyvinyl Chloride (PVC-U) compound according to the specifications of the UL 651 and ASTM D 1784 STANDARD.

- Rated for use with 90-degree C wire.
- UL Listed SUNLIGHT RESISTANT
- Designed for underground or aboveground applications that are at risk of physical damage
- Rigid non metallic PVC for wires and cables
- Plain end connections are solvent weld
- 10' Lengths • 20' Lengths (on request)

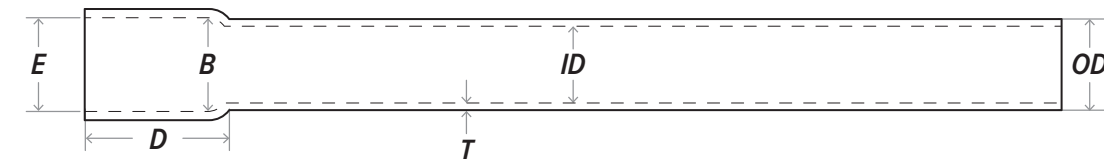


PVC Conduit Schedule 80 (Crate Quantities)									
Part No.	Size inch	Minimum wall inch	Average inch (OD)	Average inch (ID)	Average entrance inch (E)	Average bottom inch (B)	Length feet	Bell End inch (D)	Feet per bundle
P01HC	1/2	0.147	0.840	0.502	0.852	0.836	10	1.77	6,000
P02HC	3/4	0.154	1.050	0.698	1.064	1.046	10	2.16	4,400
P10HC	1	0.179	1.315	0.910	1.330	1.310	10	2.56	3,600
P11HC	1-1/4	0.191	1.660	1.227	1.677	1.655	10	3.15	3,300
P12HC	1-1/2	0.200	1.900	1.446	1.918	1.894	10	3.15	2,250
P20HC	2	0.218	2.375	1.881	2.393	2.369	10	3.15	1,400
P21HC	2-1/2	0.276	2.875	2.250	2.890	2.868	10	3.15	930
P30HC	3	0.300	3.500	2.820	3.515	3.492	10	3.94	880
P31HC	3-1/2	0.318	4.000	3.486	4.015	3.992	10	3.94	630
P40HC	4	0.337	4.500	3.737	4.515	4.491	10	3.94	570
P50HC	5	0.375	5.563	4.713	5.593	5.553	10	3.94	380
P60HC	6	0.432	6.625	5.646	6.658	6.614	10	5.90	280
P80HC	8	0.500	8.622	7.460	8.670	8.610	10	6.29	180



Utility Duct DB (Direct Burial)

PVC Conduit Utility Duct is used to protect and manage underground cables. Utility ducts can be installed directly in the ground (direct burial). The utility ducts are designed to meet specific standards and requirements to ensure reliability and safety in various applications.

- Complies with NEMA TC 6 & 8.
- Built to withstand mechanical stress, making them reliable even in harsh underground conditions.
- 20' lengths.
- Manufactured with high modulus of elasticity.

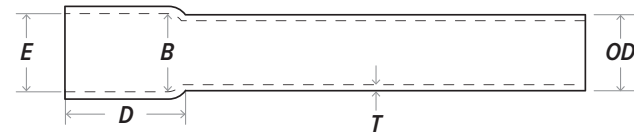

PVC Conduit Utility duct Direct Burial 60								
Part No.	Item description	Min. wall inch (T)	Average inch (OD)	Avg. entrance inch (E)	Avg. bottom inch (B)	Length inch	Bell end inch (D)	Feet per bundle
P20D6	PVC Conduit Utility Duct 2" DB60	0.060	2.375	2.387	2.369	240	3.150	3,960
P30D6	PVC Conduit Utility Duct 3" DB60	0.092	3.500	3.516	3.492	240	3.740	1,840
P40D6	PVC Conduit Utility Duct 4" DB60	0.121	4.500	4.518	4.491	240	3.937	1,140
P50D6	PVC Conduit Utility Duct 5" DB60	0.152	5.563	5.583	5.553	240	4.331	760
P60D6	PVC Conduit Utility Duct 6" DB60	0.182	6.625	6.647	6.614	240	5.000	560

PVC Conduit Utility duct Direct Burial 100								
Part No.	Item description	Min. wall inch (T)	Average inch (OD)	Avg. entrance inch (E)	Avg. bottom inch (B)	Length inch	Bell end inch (D)	Feet per bundle
P30D1	PVC Conduit Utility Duct 3" DB100	0.112	3.500	3.516	3.492	240	3.740	1,840
P40D1	PVC Conduit Utility Duct 4" DB100	0.145	4.500	4.518	4.491	240	3.937	1,140
P50D1	PVC Conduit Utility Duct 5" DB100	0.179	5.563	5.583	5.553	240	4.331	760
P60D1	PVC Conduit Utility Duct 6" DB100	0.213	6.625	6.647	6.614	240	5.000	560


PVC Conduit Utility duct Direct Burial 120								
Part No.	Item description	Min. wall inch (T)	Average inch (OD)	Avg. entrance inch (E)	Avg. bottom inch (B)	Length inch	Bell end inch (D)	Feet per bundle
P10D2	PVC Conduit Utility Duct 1" DB120	0.060	1.331	1.325	1.310	240	2.165	7,200
P20D2	PVC Conduit Utility Duct 2" DB120	0.077	2.375	2.387	2.369	240	3.150	3,960
P30D2	PVC Conduit Utility Duct 3" DB120	0.118	3.5	3.516	3.492	240	3.740	1,840
P40D2	PVC Conduit Utility Duct 4" DB120	0.154	4.5	4.518	4.491	240	3.937	1,140
P50D2	PVC Conduit Utility Duct 5" DB120	0.191	5.563	5.583	5.553	240	4.331	760
P60D2	PVC Conduit Utility Duct 6" DB120	0.227	6.625	6.647	6.614	240	5.000	560



Utility Duct EB (Encased Burial)

PVC Conduit Utility Duct is used to protect and manage underground cables. Utility ducts can be encased in the ground (encased burial). The utility ducts are designed to meet specific standards and requirements to ensure reliability and safety in various applications.

- Complies with NEMA TC 6 & 8.
- Built to withstand mechanical stress, making them reliable even in harsh underground conditions.
- 20' lengths.
- Manufactured with high modulus of elasticity.

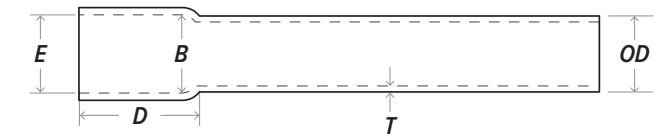

PVC Conduit Utility duct Encased Burial 35								
Part No.	Item description	Min. wall inch (T)	Average inch (OD)	Avg. entrance inch (E)	Avg. bottom inch (B)	Length inch	Bell end inch (D)	Feet per bundle
P40E3	PVC Conduit Utility Duct 4" EB35	0.100	4.500	4.518	4.491	240	3.937	1,140
P50E3	PVC Conduit Utility Duct 5" EB35	0.126	5.563	5.583	5.553	240	4.331	760
P60E3	PVC Conduit Utility Duct 6" EB35	0.152	6.625	6.647	6.614	240	5.000	560



PVC Conduit Utility duct Encased Burial 20								
Part No.	Item description	Min. wall inch (T)	Average inch (OD)	Avg. entrance inch (E)	Avg. bottom inch (B)	Length inch	Bell end inch (D)	Feet per bundle
P20E2	PVC Conduit Utility Duct 2" EB20	0.060	2.375	2.387	2.369	240	3.150	3,960
P30E2	PVC Conduit Utility Duct 3" EB20	0.061	3.500	3.516	3.492	240	3.740	1,840
P40E2	PVC Conduit Utility Duct 4" EB20	0.082	4.500	4.518	4.491	240	3.937	1,140
P50E2	PVC Conduit Utility Duct 5" EB20	0.103	5.563	5.583	5.553	240	4.331	760
P60E2	PVC Conduit Utility Duct 6" EB20	0.125	6.625	6.647	6.614	240	5.000	560


ALVA

PVC Conduit Schedule 40 Plain End 90° Standard Radius Elbows

The Elbows change the direction of the conduit run, allowing wiring to navigate around obstacles and follow building layouts.



- Rated for use with 90-degree C wire.
- Sunlight resistant rated. Complies to ANSI/UL 651 file number E528320 and NEMA TC2.
- Constructed from SCH.40 PVC for added strength and durability.
- Designed for both outdoor and indoor applications.
- Ideal for aboveground and underground installations.
- National Electrical Code (NEC 2014) Article 352.

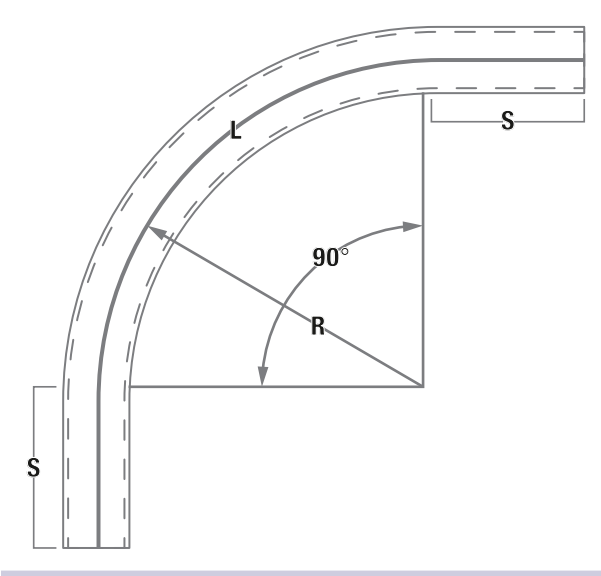


PVC Conduit SCH40 Plain End - 90° Elbow Standard Radius					
Part No.	Size	R	S	L	Box qty
PE01U90	1/2"	4.000	1.500	6.250	40
PE02U90	3/4"	4.500	1.500	7.125	40
PE10U90	1"	5.750	1.875	9.000	50
PE11U90	1-1/4"	7.250	2.000	11.375	25
PE12U90	1-1/2"	8.250	2.000	13.000	20
PE20U90	2"	9.500	2.000	15.000	15
PE21U90	2-1/2"	10.500	3.000	16.500	190
PE30U90	3"	13.000	3.125	20.375	110
PE31U90	3-1/2"	15.000	3.250	23.500	-
PE40U90	4"	16.000	3.375	25.125	-
PE50U90	5"	24.000	3.625	37.675	-
PE60U90	6"	30.000	3.750	47.125	-


ALVA

PVC Conduit Schedule 40 Plain End 45° Standard Radius Elbows

The Elbows change the direction of the conduit run, allowing wiring to navigate around obstacles and follow building layouts.

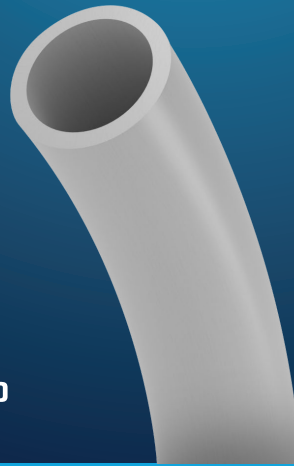

- Rated for use with 90-degree C wire.
- Sunlight resistant rated. Complies to ANSI/UL 651 file number E528320 and NEMA TC2.
- Constructed from SCH.40 PVC for added strength and durability.
- Designed for both outdoor and indoor applications.
- Ideal for aboveground and underground installations.
- National Electrical Code (NEC 2014) Article 352.

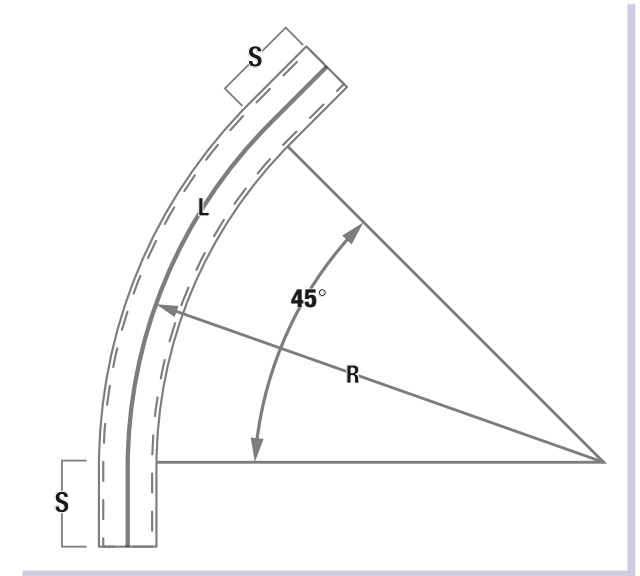

PVC Conduit SCH40 Plain End - 45° Elbow Standard Radius					
Part No.	Size	R	S	L	Box qty
PE01U45	1/2"	4.000	1.500	3.125	50
PE02U45	3/4"	4.500	1.500	3.500	50
PE10U45	1"	5.750	1.875	4.500	50
PE11U45	1-1/4"	7.250	2.000	5.688	35
PE12U45	1-1/2"	8.250	2.000	6.500	20
PE20U45	2"	9.500	2.000	7.500	15
PE21U45	2-1/2"	10.500	3.000	8.250	20
PE30U45	3"	13.000	3.125	10.188	25
PE31U45	3-1/2"	15.000	3.250	11.813	-
PE40U45	4"	16.000	3.375	12.563	-
PE50U45	5"	24.000	3.625	18.875	-
PE60U45	6"	30.000	3.750	23.563	-


ALVA

PVC Conduit Schedule 40 Bell End 90° Standard Radius Elbows



The Elbows change the direction of the conduit run, allowing wiring to navigate around obstacles and follow building layouts.

- Rated for use with 90-degree C wire.
- Sunlight resistant rated. Complies to ANSI/UL 651 file number E528320 and NEMA TC2
- Constructed from SCH.40 PVC for added strength and durability.
- Designed for both outdoor and indoor applications.
- Ideal for aboveground and underground installations.
- National Electrical Code (NEC 2014) Article 352.

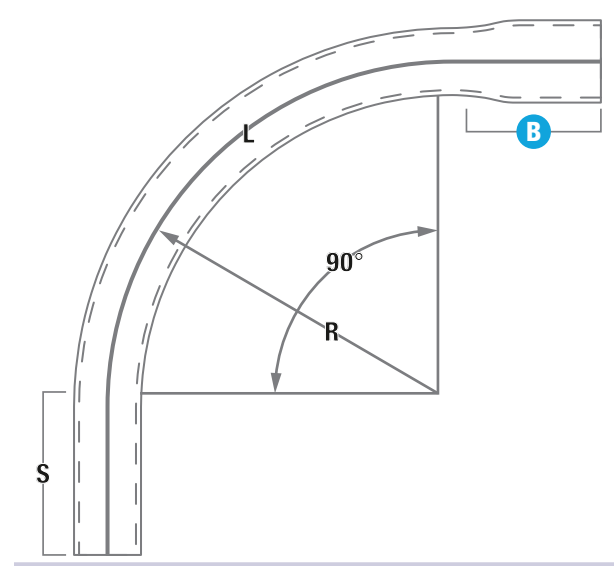

PVC Conduit SCH40 Bell End - 90° Elbow Standard Radius						
Part No.	Size	R	S	B	L	Box qty
PE01U90BE	1/2"	4.000	1.500	1.000	6.250	40
PE02U90BE	3/4"	4.500	1.500	1.500	7.125	40
PE10U90BE	1"	5.750	1.875	1.500	9.000	40
PE11U90BE	1-1/4"	7.250	2.000	1.500	11.375	20
PE12U90BE	1-1/2"	8.250	2.000	2.000	13.000	20
PE20U90BE	2"	9.500	2.000	2.000	15.000	15
PE21U90BE	2-1/2"	10.500	3.000	2.250	16.500	190
PE30U90BE	3"	13.000	3.125	2.500	20.375	110
PE31U90BE	3-1/2"	15.000	3.250	3.250	23.500	-
PE40U90BE	4"	16.000	3.375	3.250	25.125	-
PE50U90BE	5"	24.000	3.625	4.250	37.675	-
PE60U90BE	6"	30.000	3.750	5.000	47.125	-


ALVA

PVC Conduit Schedule 40 Bell End 45° Standard Radius Elbows



The Elbows change the direction of the conduit run, allowing wiring to navigate around obstacles and follow building layouts.

- Rated for use with 90-degree C wire.
- Sunlight resistant rated. Complies to ANSI/UL 651 file number E528320 and NEMA TC2
- Constructed from SCH.40 PVC for added strength and durability.
- Designed for both outdoor and indoor applications.
- Ideal for aboveground and underground installations.
- National Electrical Code (NEC 2014) Article 352.

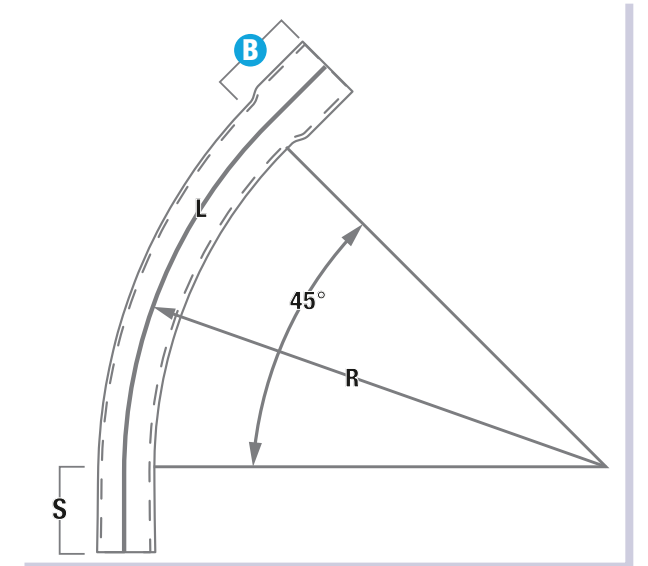

PVC Conduit SCH40 Bell End - 45° Elbow Standard Radius						
Part No.	Size	R	S	B	L	Box qty
PE01U45BE	1/2"	4.000	1.500	1.000	3.125	75
PE02U45BE	3/4"	4.500	1.500	1.500	3.500	25
PE10U45BE	1"	5.750	1.875	1.500	4.500	20
PE11U45BE	1-1/4"	7.250	2.000	1.500	5.688	30
PE12U45BE	1-1/2"	8.250	2.000	2.000	6.500	15
PE20U45BE	2"	9.500	2.000	2.000	7.500	10
PE21U45BE	2-1/2"	10.500	3.000	2.250	8.250	20
PE30U45BE	3"	13.000	3.125	2.500	10.188	25
PE31U45BE	3-1/2"	15.000	3.250	3.250	11.813	-
PE40U45BE	4"	16.000	3.375	3.250	12.563	-
PE50U45BE	5"	24.000	3.625	4.250	18.875	-
PE60U45BE	6"	30.000	3.750	5.000	23.563	-



enviro 204 PVC / uPVC CEMENT
MEDIUM BODY / CLEAR

- Clear, medium body, PVC / uPVC cement for use on pipe and fittings up to 6" (160 mm) diameter for schedule 40 and 4" (110 mm) for schedule 80
- To be used for plumbing, pressure/non-pressure applications, electrical conduit and PVC foam core
- Can be used without primer on non-pressure applications if local codes permit
- Meets ASTM D2564

Industry Listing	Hydrostatic Burst	Lap Shear Strength	Size	Part No.
 PW-G-DWV-SW U.P. Code	Minimum	Minimum	2 oz / 59 ml	30406
	400 psi after	250 psi after	4 oz / 118 ml	30401
	2 hour cure	2 hour cure	8 oz / 237 ml	30402
	@ 73 °F (23 °C)	@ 73 °F (23 °C)	16 oz / 473 ml	30403
			32 oz / 946 ml	30404
		128 oz / 3.8 L	30405	



enviro 206 PVC / uPVC CEMENT
MEDIUM BODY / GRAY

- **Industrial Grade Line of Products**
- Gray, medium body, PVC / uPVC cement for use on pipe and fittings up to 6" (160 mm) diameter for schedule 40 and 4" (110 mm) for schedule 80
- Industrial strength formula for industrial, irrigation, DWV, electrical conduit, and PVC foam core pipe
- Can be used without primer on non-pressure systems if local codes permit
- Meets ASTM D2564

Industry Listing	Hydrostatic Burst	Lap Shear Strength	Size	Part No.
 PW-G-DWV-SW U.P. Code	Minimum	Minimum	4 oz / 118 ml	30601
	400 psi after	250 psi after	8 oz / 237 ml	30602
	2 hour cure	2 hour cure	16 oz / 473 ml	30603
	@ 73 °F (23 °C)	@ 73 °F (23 °C)	32 oz / 946 ml	30604
			128 oz / 3.8 L	30605



enviro 216 PVC / uPVC CEMENT
HEAVY BODY / GRAY

- **Industrial Grade Line of Products**
- Gray, heavy body, PVC / uPVC cement for use on all classes and schedules of PVC pipe and fittings with interference fit up to 12" (315 mm) diameter
- Industrial strength cement formulated for gap filling, recommended for plumbing, industrial, irrigation and electrical conduit
- Meets ASTM D2564

Industry Listing	Hydrostatic Burst	Lap Shear Strength	Size	Part No.
 PW-G-DWV-SW U.P. Code	Minimum	Minimum	2 oz / 59 ml	31606
	400 psi after	250 psi after	4 oz / 118 ml	31601
	2 hour cure	2 hour cure	8 oz / 237 ml	31602
	@ 73 °F (23 °C)	@ 73 °F (23 °C)	16 oz / 473 ml	31603
			32 oz / 946 ml	31604
		128 oz / 3.8 L	31605	



enviro 211 CLEAR PRIMER

- Clear, fast acting primer for proper softening and preparation of all schedules and sizes of PVC and CPVC pipe and fitting surfaces
- Meets ASTM F656

CAUTION: Do not use on ABS or thin walled PVC pipes & fittings.

Industry Listing	Size	Part No.
 pw-g-dwv-sw	4 oz / 118 ml	31101
	8 oz / 237 ml	31102
	16 oz / 473 ml	31103
	32 oz / 946 ml	31104
	128 oz / 3.8 L	31105



enviro 212 PURPLE PRIMER

- Purple, fast acting primer for proper softening and preparation of all schedules and sizes of PVC and CPVC pipe and fitting surfaces
- Meets ASTM F656

CAUTION: Do not use on ABS or thin walled PVC pipes & fittings.

Industry Listing	Size	Part No.
 pw-g-dwv-sw	4 oz / 118 ml	31201
	8 oz / 237 ml	31202
	16 oz / 473 ml	31203
	32 oz / 946 ml	31204



651 PVC / uPVC CEMENT
REGULAR BODY / CLEAR

- Clear, regular body PVC/uPVC cement for use on pipes up to 8" (200 mm) diameter for schedule 40
- To be used on electrical conduit applications only
- For superior joint, use with E-Z Weld primers
- Meets ASTM D2564, UL 651 and NEMA TC-2, TC-6, and TC-8

Industry Listing	Hydrostatic Burst	Lap Shear Strength	Size	Part No.
 PW-G-DWV-SW U.P. Code	Minimum	Minimum	4 oz / 118 ml	65101
	400 psi after	250 psi after	8 oz / 237 ml	65102
	2 hour cure	2 hour cure	16 oz / 473 ml	65103
	@ 73 °F (23 °C)	@ 73 °F (23 °C)	32 oz / 946 ml	65104
			128 oz / 3.8 L	65105



215 ALL TEMPERATURE CEMENT
MEDIUM BODY / CLEAR

- Clear, medium body, PVC / uPVC cement for use on pipe and fittings up to 6" (160 mm) diameter for schedule 40 and 4" (110 mm) for schedule 80
- To be used for plumbing, irrigation, electrical conduit and PVC foam core
- No primer needed on non-pressure DWV applications, where local codes permit
- Temp: -15°F to 110°F (-26°C to 43°C)
- Meets ASTM D2564

Industry Listing	Hydrostatic Burst	Lap Shear Strength	Size	Part No.
 PW-DWV-SW	Minimum	Minimum	16 oz / 473 ml	21503
	400 psi after	250 psi after	32 oz / 946 ml	21504
	2 hour cure	2 hour cure	128 oz / 3.8 L	21505
	@ 73 °F (23 °C)	@ 73 °F (23 °C)		



201 ENT PVC / uPVC CEMENT
MEDIUM BODY / BLUE

- Blue, medium body, PVC / uPVC cement for use on all PVC electrical conduit or any non-pressure PVC application with interference fit up to 6" (160 mm) diameter.
- Specially formulated for electrical non-metallic tubing commonly known as "SMURF" pipe.
- Can be used without primer if local codes permit

Industry Listing	Hydrostatic Burst	Lap Shear Strength	Size	Part No.
 PW-DWV-SW	Minimum	Minimum	16 oz / 473 ml	20103
	400 psi after	250 psi after	32 oz / 946 ml	20104
	2 hour cure	2 hour cure	128 oz / 3.8 L	20105
	@ 73 °F (23 °C)	@ 73 °F (23 °C)		



Cement applicators and accessories

Plastic cap & brush		Dauber					
Part No.	11000	Part No.	12006	12002	12003	12004	
Size	1"	Size	2 oz	4 oz/118 ml 8 oz/237 ml	16 oz/473 ml	32 oz/946 ml	
Pack	50 pc/case	Pack	100 pc/case	100 pc/case	100 pc/case	100 pc/case	
Telescoping dauber (Small ball)		Telescoping dauber (Large ball)		8" Swab		Telescoping dauber (Large ball)	
Part No.	13001	Part No.	13002	Part No.	13005	Part No.	13005W
Size	4 oz/118 ml (11401) 8 oz/237 ml (11501)	Size	16 oz/473 ml (11103) 32 oz/946 ml (110204)	Size	128 oz/3.8 L	Size	2-7/8" 128 oz/3.8 L
Pack	50 pc/case	Pack	50 pc/case	Pack	12 pc/case	Pack	12 pc/case

Average Number of Joints per Quart Can*

Pipe Nominal Size	ASTM	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	18
	ISO (DIN)	20	25	32	40	50	63	75	90	110	160	200	250	315	350	450
Number of Joints		300	200	125	105	90	60	50	40	30	10	6	2-3	1-2	3/4	1/2

*This chart should be used as a general reference only as these figures are estimates based on testing done under laboratory conditions. Field working conditions can vary significantly.

Pipe Size Equivalent Chart

ASTM	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	18
ISO (DIN)	20	25	32	40	50	63	75	90	110	160	200	250	315	350	450

Average Handling / Set-up Times**

Handling / Set-up time is the time required prior to handling the joint carefully. In damp or humid weather, allow 50% additional cure time.

Temperature While Joining	Pipe Diameter 1/2" to 1 1/4" 15 mm to 32 mm	Pipe Diameter 1 1/2" to 2" 40 mm to 50 mm	Pipe Diameter 2 1/2" to 5" 65 mm to 125 mm	Pipe Diameter 6" to 8" 150 mm to 200 mm	Pipe Diameter 10" to 16" 250 mm to 375 mm	Pipe Diameter 16"+ 400 mm
16 °C - 38 °C (60 °F - 100 °F)	2 minutes	5 minutes	25 minutes	30 minutes	2 hours	4 hours
5 °C - 16 °C (40 °F - 60 °F)	5 minutes	10 minutes	50 minutes	2 hours	8 hours	16 hours
-18 °C - 5 °C (0 °F - 40 °F)	10 minutes	15 minutes	4 hours	10 hours	24 hours	48 hours

**This chart should be used as a general reference only as these figures are estimates based on testing done under laboratory conditions. Field working conditions can vary significantly.

Average Joint Cure Times***

Joint Cure Time is the time required before pressure testing the system. In damp or humid weather, allow 50% additional cure time.

Relative Humidity 60% or Less	Pipe Diameter 1/2" to 1 1/4" 15 mm to 32 mm	Pipe Diameter 1 1/2" to 2" 40 mm to 50 mm	Pipe Diameter 2 1/2" to 8" 65 mm to 200 mm	Pipe Diameter 10" to 15" 250 mm to 375 mm	Pipe Diameter 16"+ 400 mm
Temperature While Joining and Curing	up to 145 psi / 10 bar	145 to 363 psi / 10 to 25 bar	up to 145 psi / 10 bar	145 to 363 psi / 10 to 25 bar	up to 100 psi / 7 bar
16 °C - 38 °C (60 °F - 100 °F)	15 min	6 hrs	30 min	12 hrs	1 1/2 hrs
5 °C - 16 °C (40 °F - 60 °F)	20 min	12 hrs	45 min	24 hrs	4 hrs
-18 °C - 5 °C (0 °F - 40 °F)	30 min	48 hrs	1 hour	96 hrs	72 hrs


***This chart should be used as a general reference only as these figures are estimates based on testing done under laboratory conditions. Field working conditions can vary significantly.

ALVA


Trusted Expertise

Comprehensive Solutions

Certified Quality

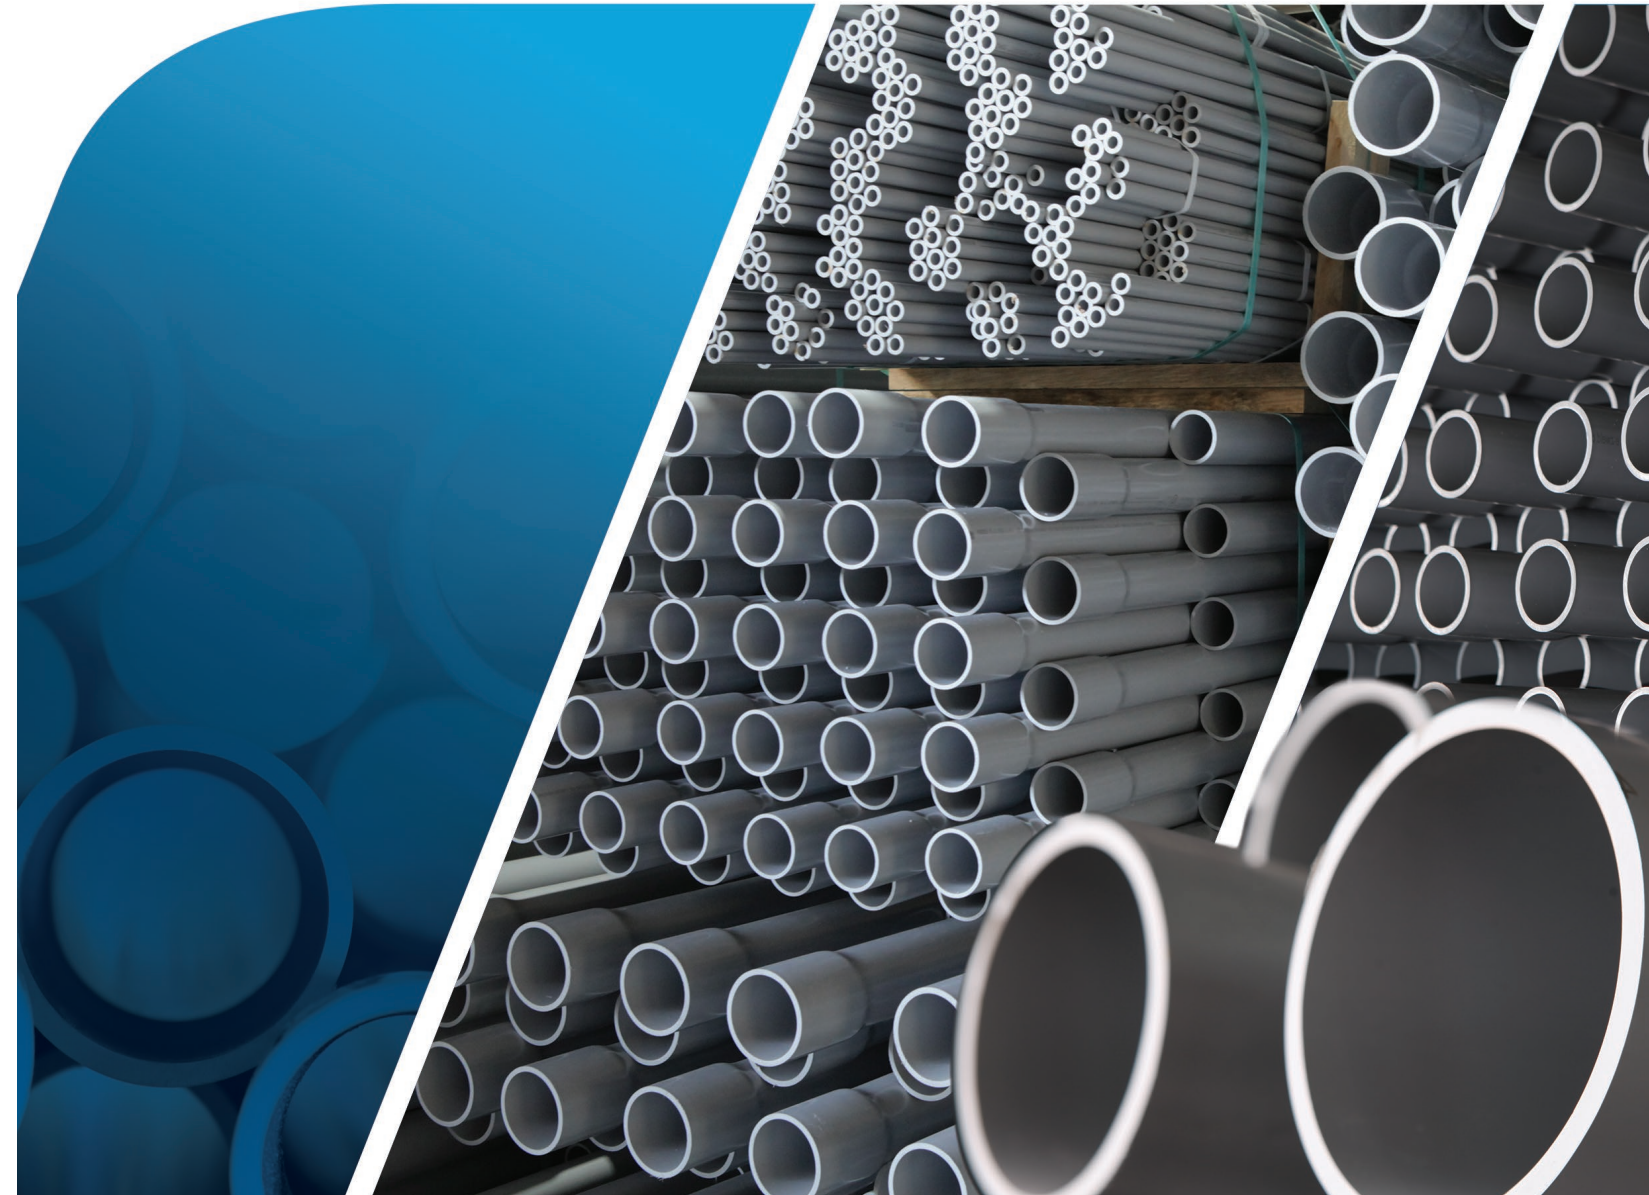

Fahrenheit to Celsius Conversion Chart

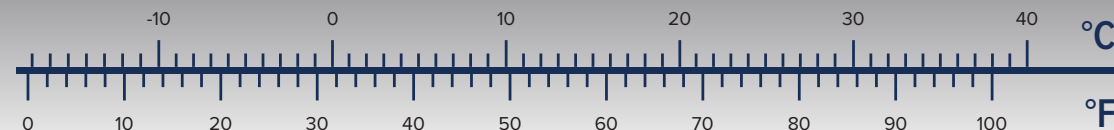

ALVA



 www.alva-mfg.com  sales@alvapvc.com   [@alvapvc](https://www.instagram.com/alvapvc)

 1969 W 9th St, Riviera Beach, Florida 33404  +1-561-421-1868